

**State of Utah
Division of Facilities Construction and Management**

Utah National Guard

**Blanding Armory-Roofing Improvements
Blanding, Utah**

Project Number: 04145470

Addendum Number 1

10 January, 2005

Information contained within this addendum modifies project drawings and specifications previously issued and becomes a part of the contract documents. Acknowledge receipt of this addendum in your bid proposal.


Index to Addendum Number 1

Cover Page.
Architectural page number 1 of 1.
Ladder Section, AD-1
Ladder Elevation and Details, AD-2


Harold P. Woodruff Architect\Planner
223 East 800 South
Salt Lake City, Utah 84111
801-355-8684

General:

1. The FR-10 fire-rated slip sheet shall be installed over all of the roofing insulation (existing and new).
2. The contractor shall protect the wood floor in the Drill Hall with heavy drop cloths and plywood prior to setting up scaffolding to work at the roof level.
3. The contractor will be responsible to maintain the roof in a water tight condition from the notice to proceed thru the completion of the project. The contractor will be compensated for work done to fix leaks during the time prior to starting the reroofing.
4. A small communication dish antenna will be installed at the lower mid-west roof area. The antenna support shall be a 2" diameter galvanized conduit installed similar to detail A1/A-101. The conduit shall have a welded cap, painted or galvanized. An antenna cable conduit shall be installed as per detail A1/A-101 with a weather head installed. Both conduits shall be flashed as per detail A5/A-501. A 24 inch x 24 inch fire rated access door shall be installed in the existing gypsum board ceiling. The access hatch shall be a Williams Brothers Corporation, Model WB-FR, 24 inch x 24 inch. The contractor shall install the steel stud framing, repair any damage to the gypsum board and paint the access door to match the existing gypsum board ceiling. Any cable penetration of the gypsum board ceiling shall be sealed with a fire caulking.
5. Due to a training schedule change the first area of the roof to be reroofed will be the lower, northwest roof corner of the building roof.
6. A roof access ladder will be installed on the west side of the building, from the lower roof to the upper roof. See attached drawings AD-1 and AD-2.
7. Additional photos of the site and roof will be available on the DFCM web site.
8. The Last Day to Submit Questions has been changed to:
Friday, January 14, 2005 at 4:00 P.M. to Rick James at DFCM.
9. The Final Addendum Issued has been changed to:
Monday, January 17, 2005 at 4:00 P.M. by DFCM or at DFCM web site (dfcm.utah.gov).
10. The Bid Due Date has been changed to:
Thursday, January 20, 2005 at 3:30 P.M. at DFCM, 4110 State Office Building, SLC, Utah.

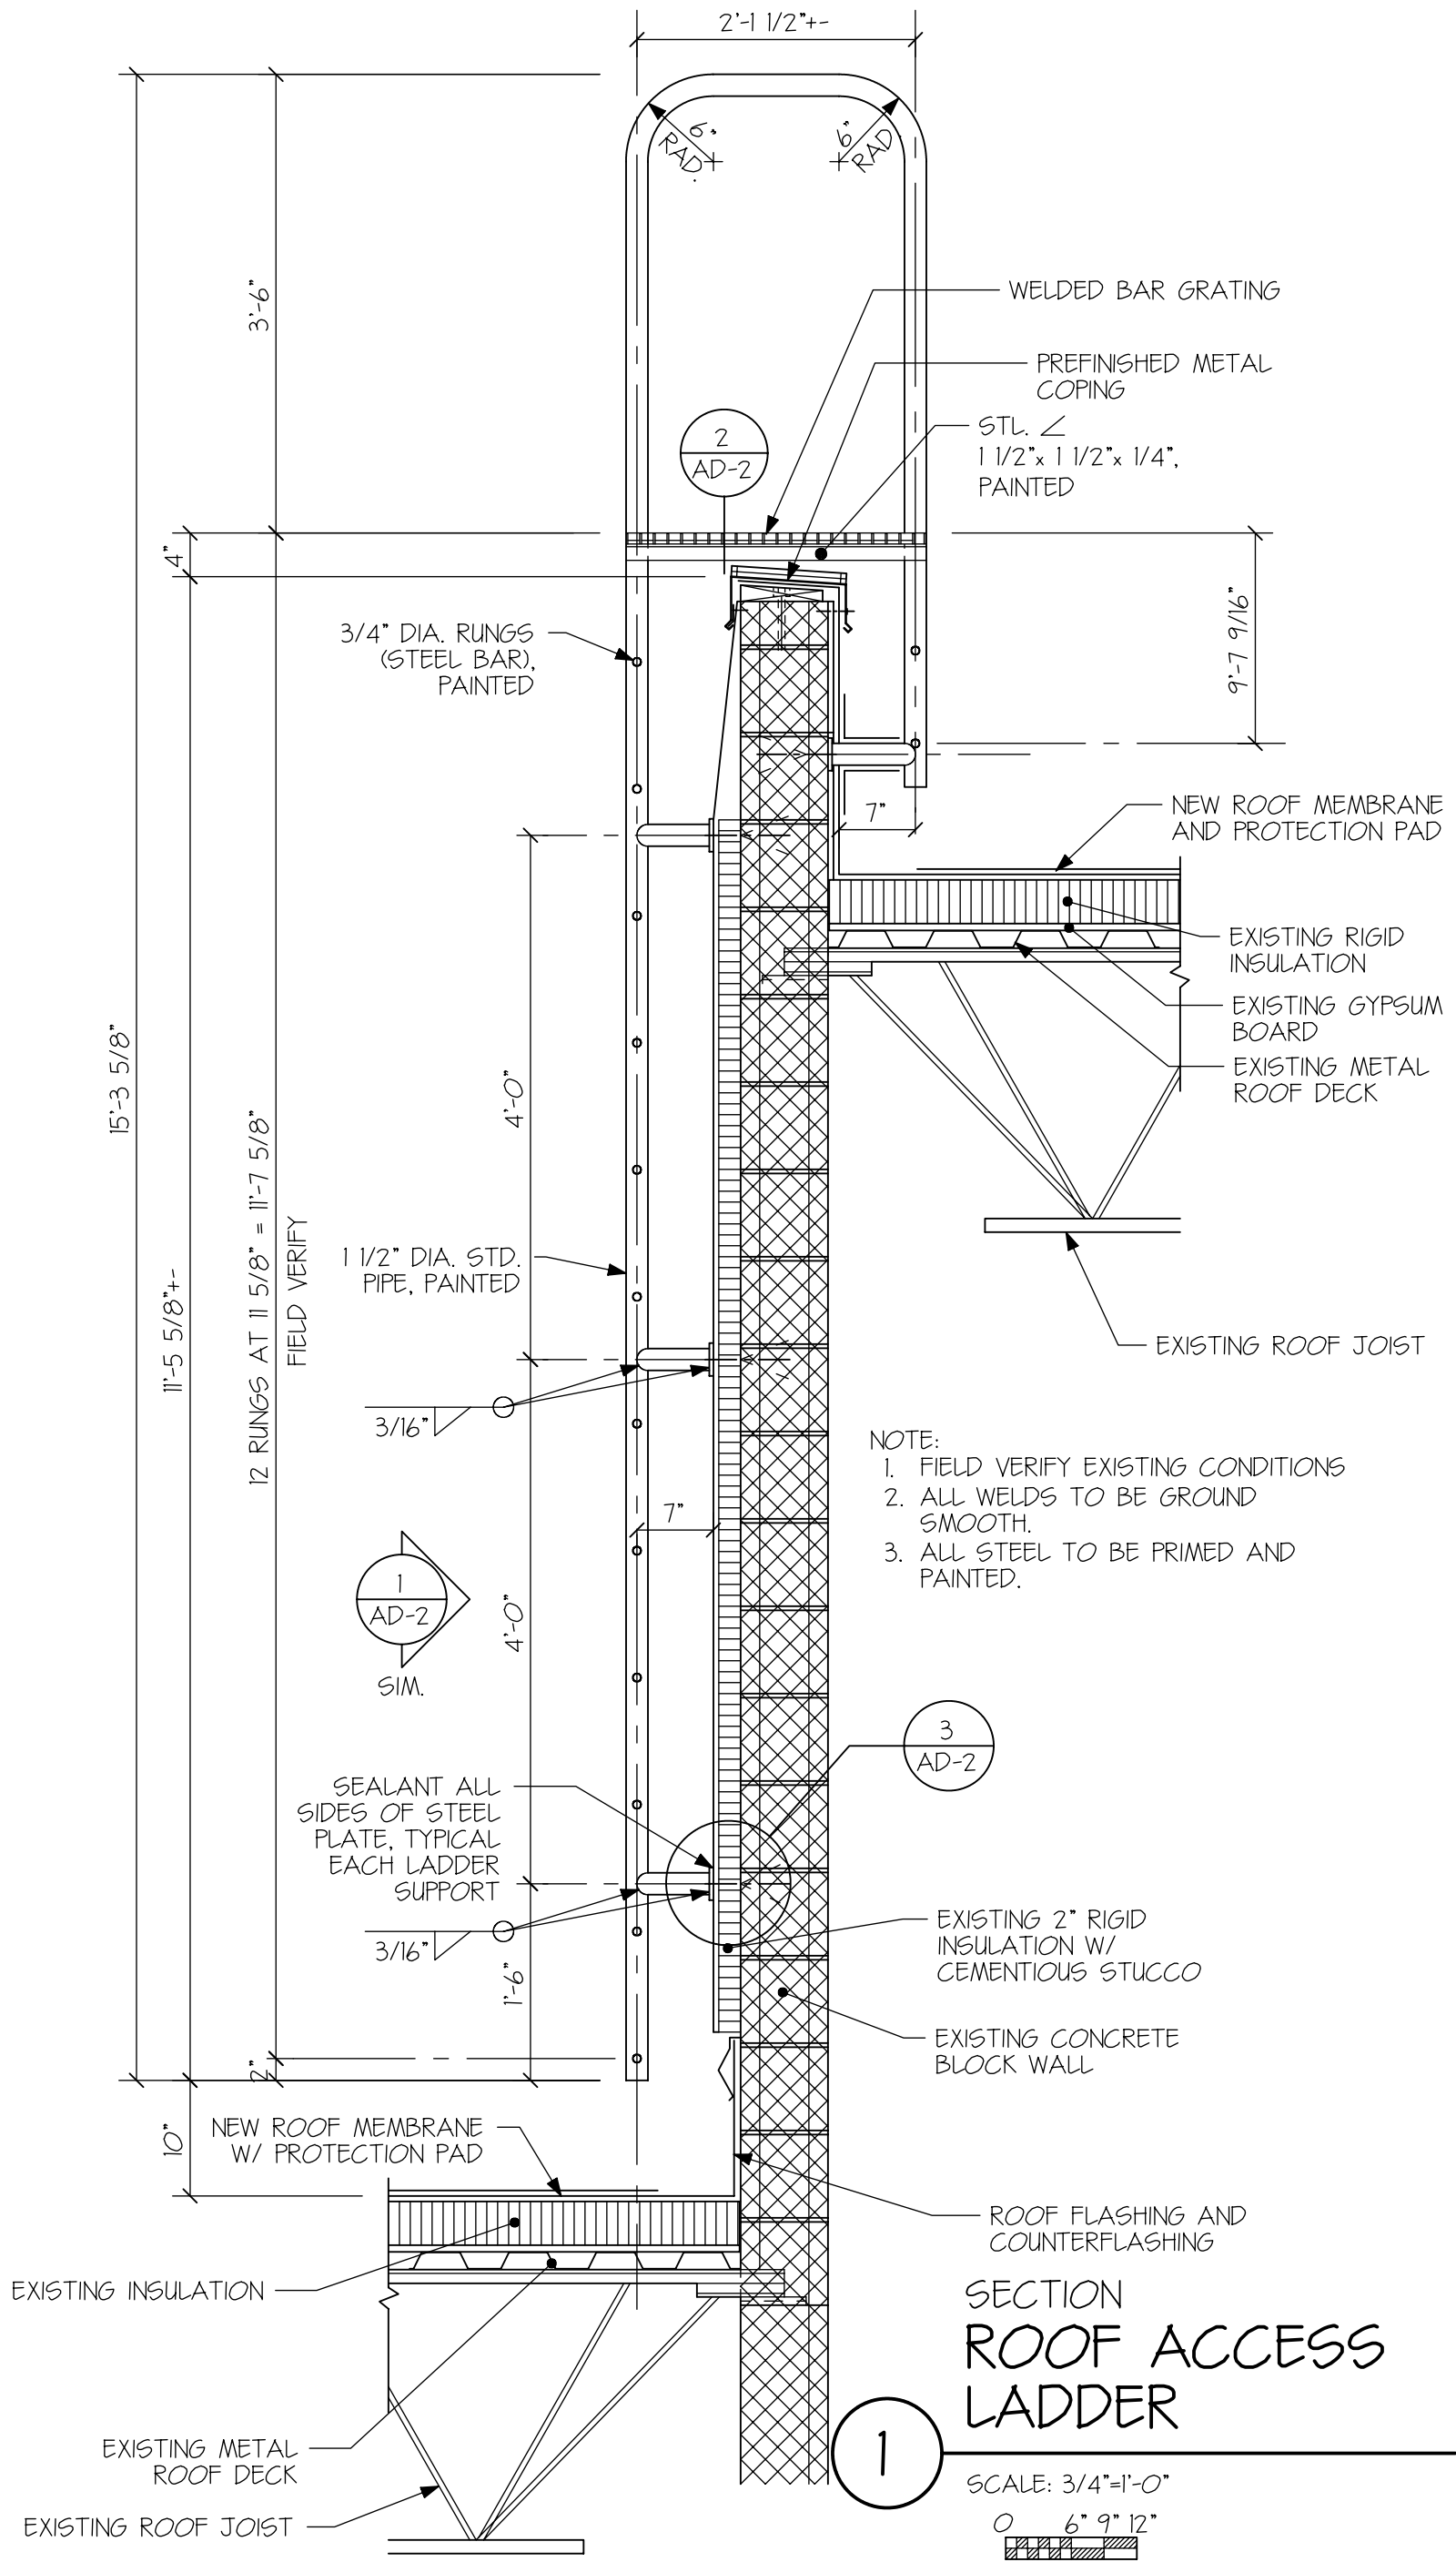

ROOF ACCESS LADDER SECTION		
ADDENDUM #1		
HAROLD P. WOODRUFF ARCHITECT/PLANNER 223 East 800 South Salt Lake City, Utah 84111 801-355-8684	State of Utah-DFCM Utah National Guard Salt Lake City, Utah Blanding Army Roofing Improvements Blanding, Utah	DATE: 01/10/2005
		SHEET NUMBER: AD-1

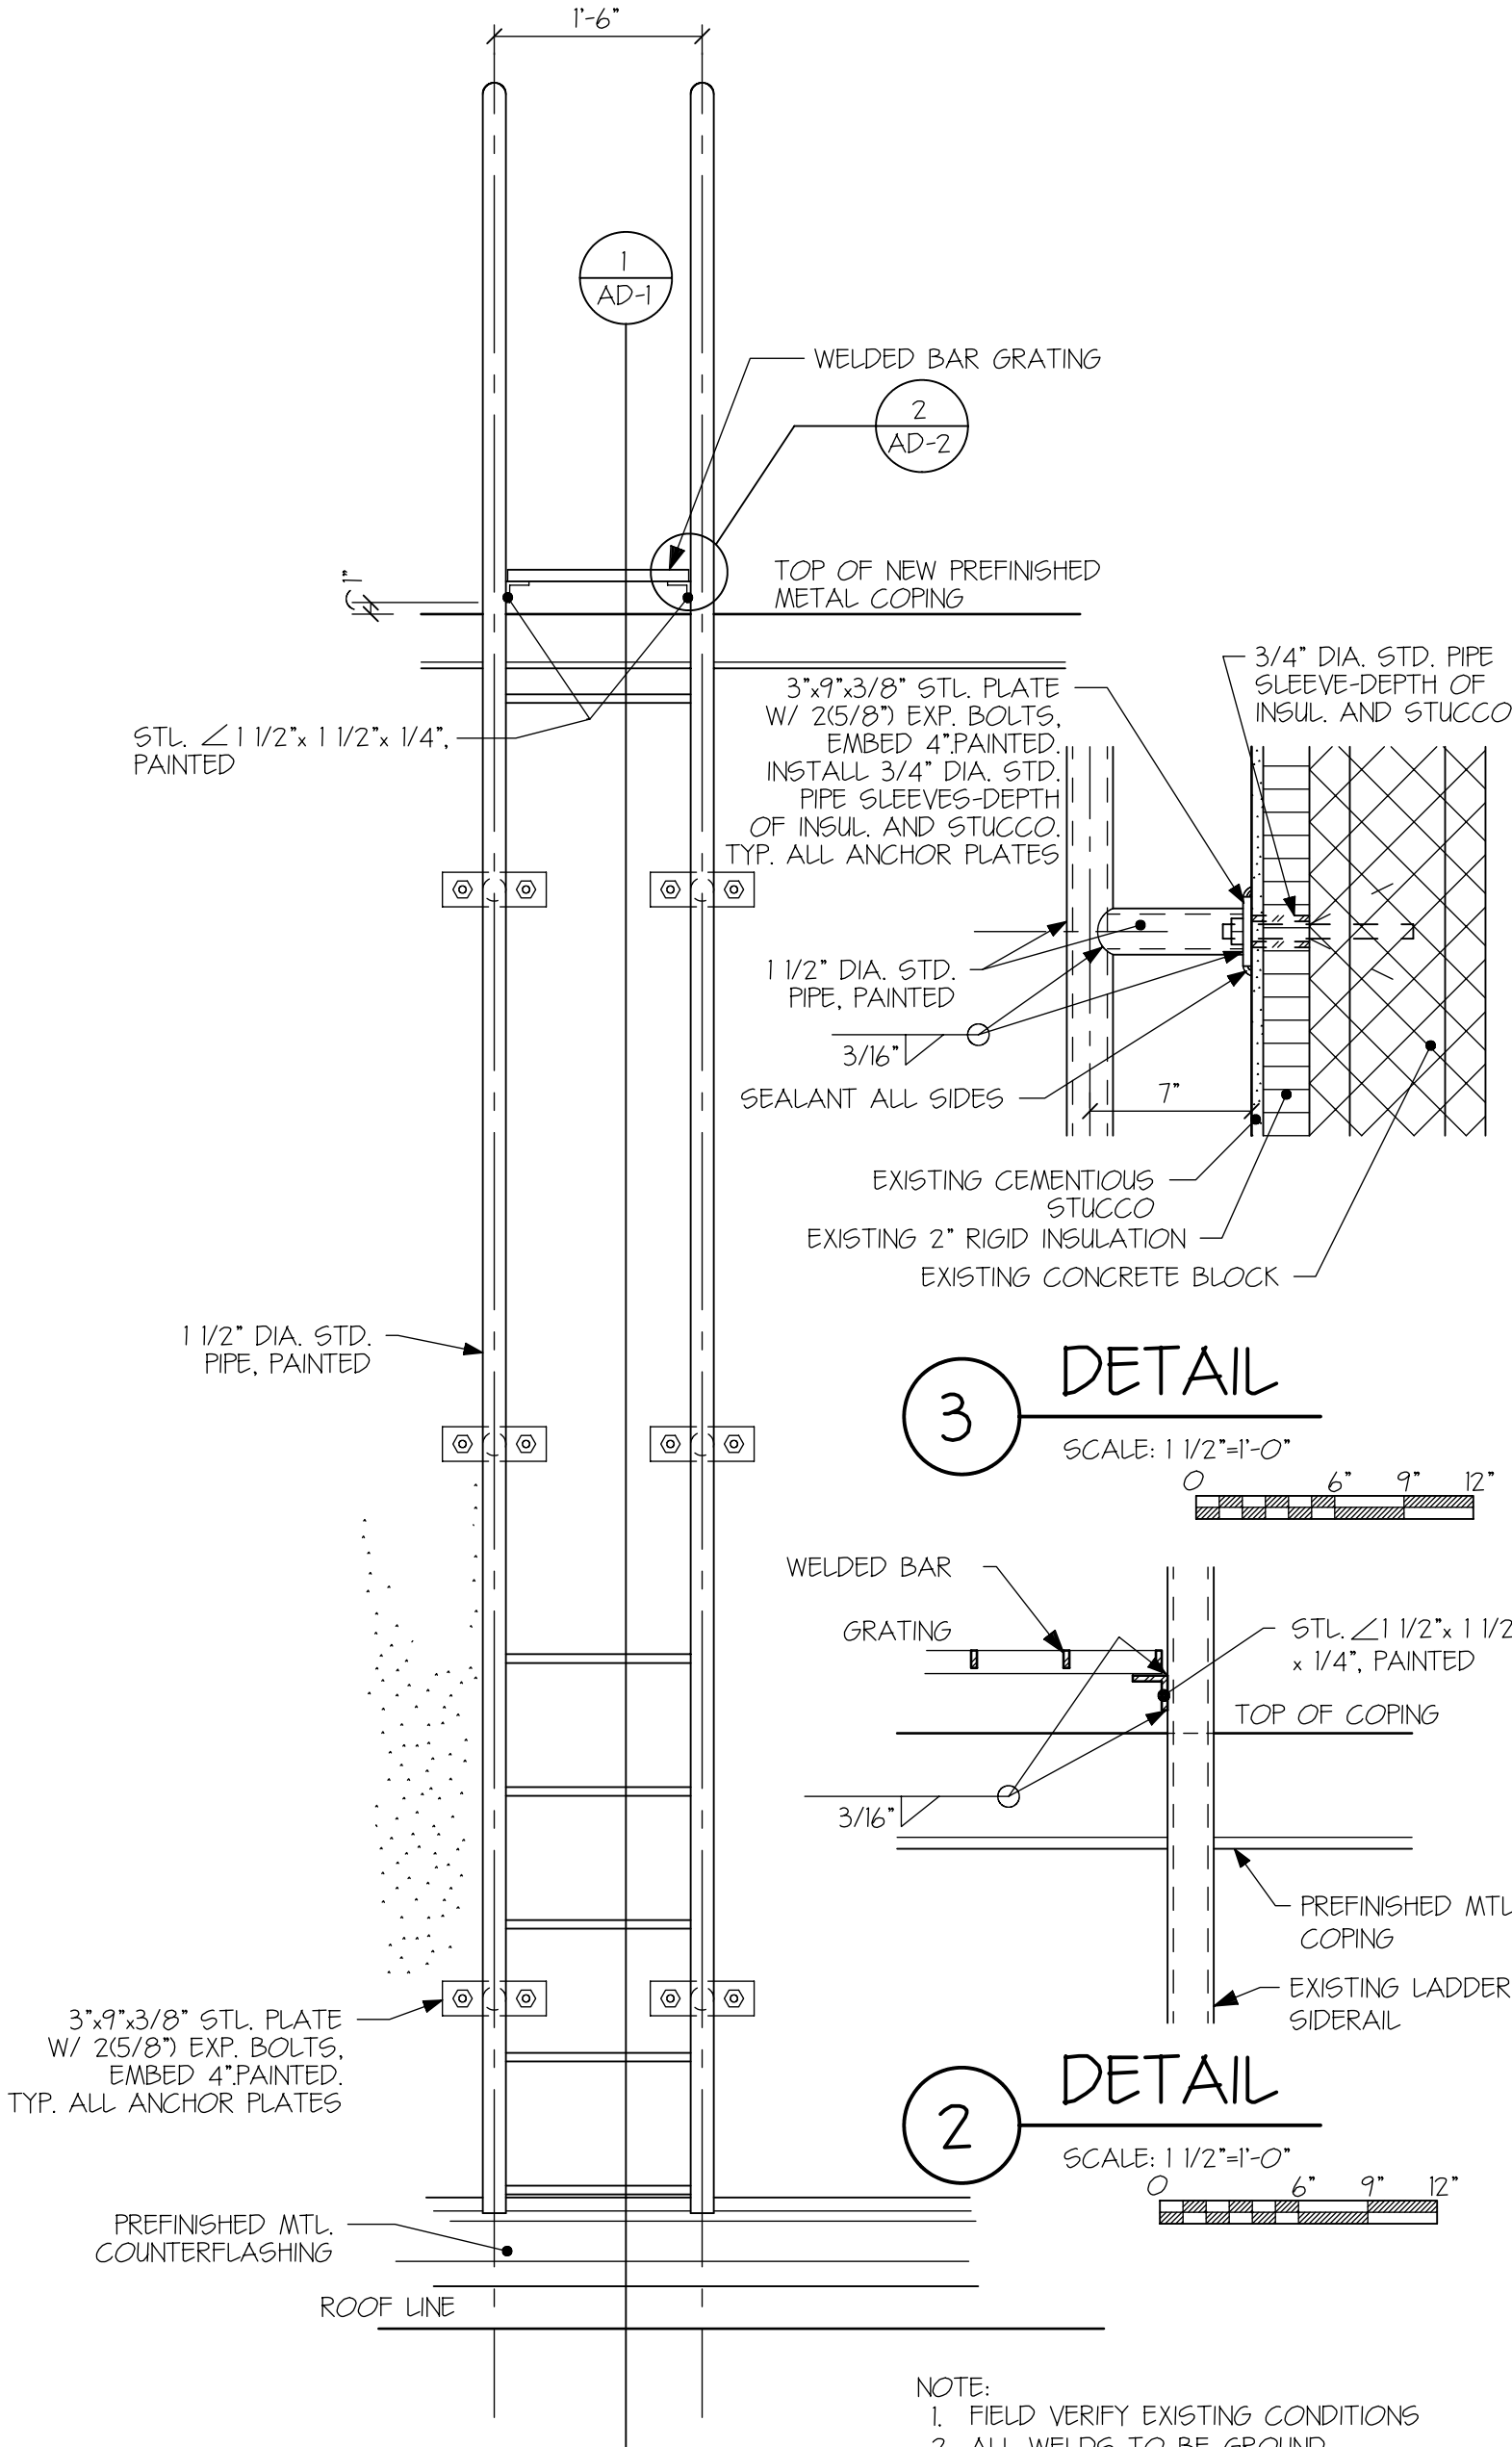

1 ELEVATION
ROOF ACCESS LADDER
SCALE: 3/4"=1'-0" 0 6" 9" 12"

ROOF ACCESS LADDER ELEVATION AND DETAILS		
		ADDENDUM #1
HAROLD P. WOODRUFF ARCHITECT\PLANNER 223 East 800 South Salt Lake City, Utah 84111 801-355-8684		DATE: 01/10/2005
		SHEET NUMBER: AD-2